

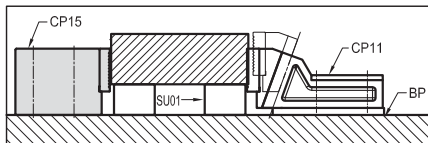


# CP15

## SERRATED BLOCK STOP

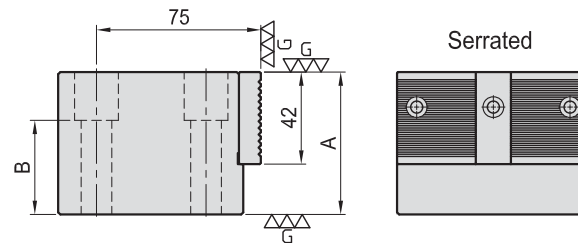

- Material :  
Body : S45C(JIS)/CK45(DIN)  
jaw : YK30(JIS) / C105W1(DIN),
- Heat treated :  
Body : HRC 40°.  
jaw : HRC 58°.
- Surface finish : Black Oxide.
- Application : Serrated stop is used with CP11 free vise. Useful for holding rough parts and where heavy clamping is needed.

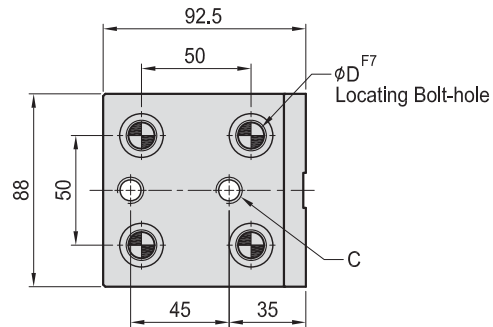

MODEL NO.	A	B	C	D	kg
CP15-1265	65	43	M12	12	3.52
CP15-1280	80	58			4.22
CP15-1665	65	38	M16	16	3.24
CP15-1680	80	53			3.78