



PT19

GRIPPER SCREW

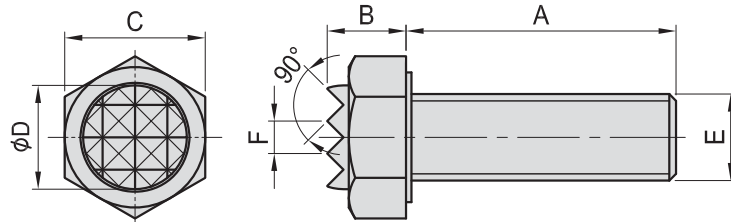

- Material : SCM435(JIS) / 34CrMo4(DIN)
- Heat treated : HRC 32°~38°
- Serrated surface to be heat treated with high frequency quenching.
- Surface finish : Black Oxide.
- Application : Multipurpose work support and clamping unit, ideal for rough parts.
- Features : Excellent holding power from the serrated face.



| MODEL NO. | A | B | C | D | E | F | kg |
|-------------|----|------|----|------|-----|-----|-------|
| PT19-061025 | 25 | 6.0 | 10 | 7.9 | M6 | 2.3 | 0.008 |
| PT19-081325 | | 7.3 | 13 | 9.5 | M8 | 3.0 | 0.015 |
| PT19-101725 | 25 | 8.4 | 17 | 12.7 | M10 | 3.0 | 0.030 |
| PT19-101740 | | | | | | | 0.035 |
| PT19-121925 | 25 | 9.5 | 19 | 15.9 | M12 | 3.0 | 0.035 |
| PT19-121940 | | | | | | | 0.050 |
| PT19-162435 | 35 | 12.0 | 24 | 19.1 | M16 | 3.0 | 0.085 |
| PT19-162450 | | | | | | | 0.100 |
| PT19-203040 | 40 | 14.5 | 30 | 25.4 | M20 | 3.0 | 0.160 |
| PT19-203060 | | | | | | | 0.205 |

Tooth plate

- Material : SKH9(JIS)
S18-1-2-5(DIN)
- Heat treated : HRC 60°

| MODEL NO. | A | B | C | D | E | F | kg |
|---------------|----|------|----|------|-----|-----|-------|
| PT19-061025-K | 25 | 6.0 | 10 | 7.9 | M6 | 2.3 | 0.008 |
| PT19-081325-K | | 7.3 | 13 | 9.5 | M8 | 3.0 | 0.015 |
| PT19-101725-K | 25 | 8.4 | 17 | 12.7 | M10 | 3.0 | 0.030 |
| PT19-101740-K | | | | | | | 0.035 |
| PT19-121925-K | 25 | 9.5 | 19 | 15.9 | M12 | 3.0 | 0.035 |
| PT19-121940-K | | | | | | | 0.050 |
| PT19-162435-K | 35 | 12.0 | 24 | 19.1 | M16 | 3.0 | 0.085 |
| PT19-162450-K | | | | | | | 0.100 |
| PT19-203040-K | 40 | 14.5 | 30 | 25.4 | M20 | 3.0 | 0.160 |
| PT19-203060-K | | | | | | | 0.205 |

Tooth plate

- Material : extremely hard